

# Legend's H-Track (HJ1) Floor Gluing Instructions

**NOTE:**

\*Necessary safety precautions are to be taken when working with StabiliGrip floor, as it contains fiberglass material.

**PARTS:**

- 1. Glue tube  
Part#: 000-015-OS2




**INSTRUCTIONS:**

- 1. Squirt a thin line of glue in both the grooves of the H-Track (also referred to as 'rail'), that is supplied with Legend's floor, as illustrated in the pictures below.

**NOTE :**

- a. A gap of 1-inch should be left closer to both the ends of the rail, to prevent the glue from oozing out.
- b. For heavy duty applications, base of the H-Track can be glued to the metal floor of the vehicle.

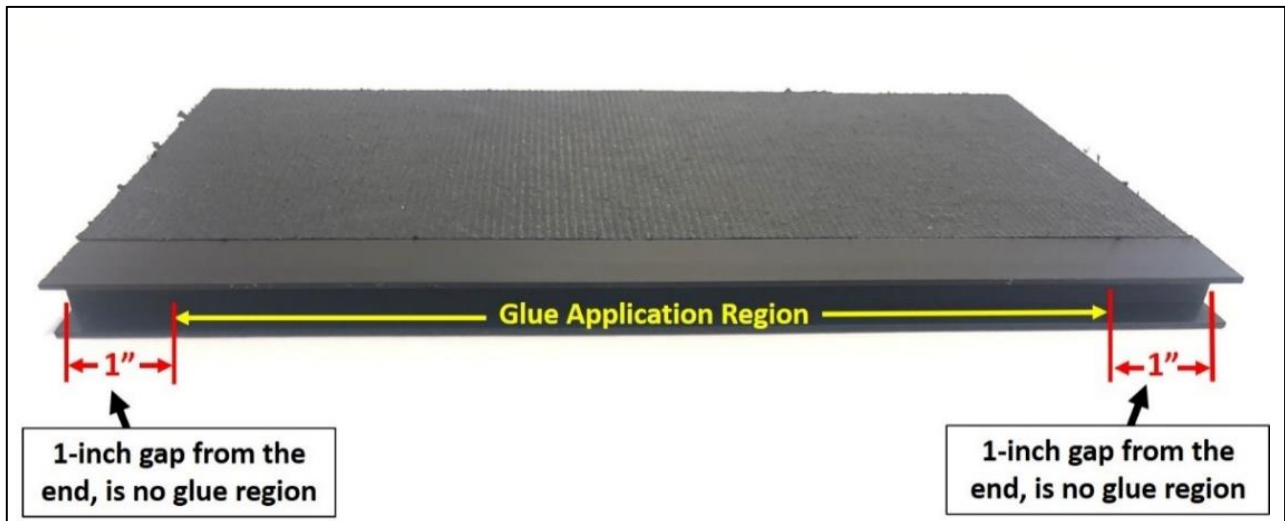

- 2. Align this H-Track with the appropriate edge of Legend's floor piece, and using a rubber mallet, gently tap it into place so that the glue holds the H-Track onto the floor piece.
- 3. Repeat this procedure for all the H-Tracks provided with the Legend's floor kit, along with following the appropriate floor's installation guide.